

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

--- BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 297 773 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.04.2003 Bulletin 2003/14

(51) Int Cl.7: A47L 9/04, A47L 5/30,
A47L 9/28

(21) Application number: 02025302.7

(22) Date of filing: 01.04.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

6,323,510

(30) Priority 03.04.1998 US 55020

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
99106662.2 / 0 947 155

(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL
CO., LTD.
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:
• Nishimura, Hiroshi
Gamo-gun, Shiga 529-1535 (JP)
• Hayashi, Seizo
Omihachiman-shi, Shiga 523-0892 (JP)

(74) Representative: Pautex Schneider, Nicole et al
Novagraaf International SA
25, Avenue du Pailly
1220 Les Avanchets - Geneva (CH)

Remarks:

This application was filed on 13 - 11 - 2002 as a
divisional application to the application mentioned
under INID code 62.

(54) Rotary brush device and vacuum cleaner using the same

(57) A motor is incorporated in a cylindrical body
which is a rotary brush. Rotation of a rotor of the motor,
directly or via a speed reduction mechanism, drives the
rotary brush. Cooling air runs through the cylindrical

body so that the motor is cooled and protected. The ro-
tary brush and an electric apparatus using the rotary
brush can be downsized and easily.

EP 1 297 773 A1

Description**Field of the Invention**

[0001] The present invention relates to a rotary brush device used in an electric vacuum cleaner and an electric apparatus using the same.

Background of the Invention

[0002] A rotary brush device of a conventional upright vacuum cleaner has been formed with a rotary brush which is housed in a floor nozzle and is driven by an electric blower motor for sucking dust. The motor is built in the main body of vacuum cleaner, and the motor through a belt or gears drives the rotary brush, or a dedicated motor is provided outside the rotary brush somewhere in a floor nozzle to drive the brush.

[0003] The conventional construction discussed above requires a considerably large space for the mechanism transmitting the rotating force. This has been a blocking factor for making an apparatus smaller in size and lighter in weight. This also has caused inconvenience of handling the apparatus.

Summary of the Invention

[0004] The present invention addresses the problems discussed above and aims to provide an apparatus where a rotary brush is provided within a cylindrical body forming the rotary brush; the rotary brush is driven by rotating force of a rotor of the motor. The present invention also contains a consideration to an airflow channel for cooling and protecting the motor. Therefore, by employing the invented rotary brush device, a compact and lightweight apparatus can be realized. The apparatus also can be handled with ease.

Brief Description of the Drawings

[0005]

Fig. 1 is a perspective view of a rotary brush device in accordance with an exemplary embodiment of the present invention.

Fig. 2 is a cross sectional top view showing an essential part of an electric apparatus incorporating a rotary brush device of the present invention.

Fig. 3 is a cross sectional top view showing an essential part of an electric apparatus incorporating a rotary brush device in accordance with other embodiment of the present invention.

Fig. 4 is a cross sectional side elevation showing an essential part of an electric apparatus incorporating a rotary brush device in accordance with other embodiment of the present invention.

Fig. 5 is a cross sectional top view showing an essential part of an electric apparatus incorporating a rotary brush device in accordance with still other embodiment of the present invention.

Fig. 6 is a cross sectional side view taken on A - A side of Fig. 2.

Fig. 7(a) is a cross sectional side view taken on B - B side of Fig. 3. (A bottom of the apparatus is on the floor.)

Fig. 7(b) is a cross sectional side view taken on B - B side of Fig. 3. (A bottom of the apparatus is off the floor.)

Fig. 8 shows an outlook of an upright vacuum cleaner, an example of electric apparatuses.

Fig. 9 is a rear view of the vacuum cleaner shown in Fig. 8.

Fig. 10 is a cross sectional side view showing an essential part of the vacuum cleaner shown in Fig. 8.

Fig. 11 is a bottom view of an essential part of a floor nozzle of the vacuum cleaner shown in Fig. 8.

Fig. 12(a) is a cross sectional side elevation showing an electric apparatus incorporating a floor detector.

Fig. 12(b) is a cross sectional side view showing the active floor detector.

Fig. 12(c) is an electric circuit diagram of the floor detector.

Fig. 13(a) is a cross sectional side view of an apparatus provided with a handle and a dust detector in accordance with an exemplary embodiment.

Fig. 13(b) is an electric circuit diagram of the above apparatus.

Detailed Description of the Exemplary Embodiments

[0006] Exemplary embodiments of the present invention are described hereinafter with reference to the accompanying drawings. In Fig. 1, cylindrical body 1 and brush 2 form a rotary brush. Bristles are transplanted in a V-shape on the outer surface of cylindrical body 1 to form brush 2. In place of the brush, an agitator, a thin plate scraper, or the like, may be used depending on objectives or applications. Numeral 3 denotes a reduc-

tion gear bracket which is a part of speed reduction mechanism, and a motor bracket 4 holds a motor housed in cylindrical body 1. First opening 6, a ventilation hole, is provided on an edge portion of the outer wall of cylindrical body 1. Numeral 32 denotes a ventilation hole provided in motor bracket 4. The bristle arrangement of brush 2, or agitator, is not limited to the V-shape, but may be of a helical shaped or another patterns for an improved capacity of dust agitation/collection.

[0007] In Fig. 2, numeral 7 denotes a rotor of the motor, stator 8 of the motor is mounted inside of motor bracket 4, and is disposed in an annular space between rotor 7 and bracket 4. Rotor shaft 9 rotates together with the rotor 7. Commutator 10 is disposed on an edge portion of rotor 7 and carbon brush 5 slidably contacts the circumference of commutator 10. Rotor 7 is powered through carbon brush 5 and commutator 10. A first bearing 11 receives the outer wall of motor bracket 4 press-fitted in its inner wall, while an outer ring of bearing 11 is press fitted into an inner wall of cylindrical body 1 at its left edge so that cylindrical body 1 is journaled at the motor end. Carbon brush 5 is mounted to part of motor bracket 4 which outwardly protrudes from cylindrical body 1 at the motor side, i.e. the motor bracket is provided outside of first bearing 11. Carbon brush 5 is mounted outside of rotational cylindrical body 1 so that wiring for power is easily provided to carbon brush 5, and so that a worn-out carbon brush could be easily replaced.

[0008] Numeral 12 denotes a third opening provided in the motor bracket 4 at the right end for taking the outside air into the motor for cooling. Numeral 13 denotes a second bearing which is press fitted to reduction gear bracket 3 and supports the right end (opposite end to the motor) of the rotor shaft with the inner ring. Numeral 14 denotes a third bearing the outer ring of which is press fitted to a portion of cylindrical body 1 (a recess on the wall opposite to motor of cylindrical body 1), while rotor shaft 9 is press fitted to the inner ring of the bearing. First gear 15 is fixed to the rotor shaft 9, and is held by and between the second bearing 13 and the third bearing 14. Second gear 16 is supported by pin 17 provided in reduction gear bracket 3, for transmitting the rotation of first gear 15 to third gear 18 formed around the inner edge of cylindrical body 1; thus cylindrical body 1 is driven at a reduced speed. Motor bearings 19 are provided at both ends of the rotor 7, the bearings 19 are held by motor bracket 4.

[0009] The structure discussed above allows cylindrical body 11 to rotate in an accurate and smooth manner with less noise and to be journaled by first bearing 11 and third bearing 14. When magnetic permeable material is used to form cylindrical body 11, efficiency of the motor is further promoted. Since heavy items, such as the motor, the reduction gear and its bracket, are placed on both ends of cylindrical body 11 in well balanced manner, cylindrical body 11 rotates with little wobble thanks to the well-balanced weight. Further, heavy items

are placed at both ends, i.e. near to the bearings, so that few chances of rotational wobble are available. Detector 20 detects abnormal pressure in a sucking passage, temperature or electric current and breaks electric supply to the motor; thus the detector is expected to function as a safety device for protecting the motor or preventing unusual heat generation. For instance, when dust is caught in the brush it may lock the rotary brush, and the temperature and the current supply to the motor exceeds a normal level. The detector detects these abnormal states so that the motor is protected and overheating is avoided. Sucked in air is utilized to cool down the motor (detailed later). However, when sucking power is lowered because a filter provided in a dust chamber (48 in Fig. 10) is clogged or the like, the detector detects a lowered pressure in the sucking passage. Since the lowered pressure causes insufficient cooling of the motor, the detector can shut the current-supply to the motor to avoid overheat. Outside-air taking room 21 introduces outside-air to first opening 6 provided on cylindrical body 1. Floor nozzle 22 incorporates the rotary brush therein. A first end of hose 23 is coupled to sucking mouth 38 provided at rear portion of floor nozzle 22. A second end of hose 23 leads to dust chamber 48 and electric blower 43, both are situated in the cleaner body that is disposed behind the floor nozzle (Ref. Fig. 10). Partition 27 is protrusively provided in floor nozzle 22 so that partition 27 surrounds both ends of cylindrical body 1. Partition 27 separates sucking chamber 28, outside-air taking room 28 where first opening 6 is situated and a second opening 32 provided on the motor bracket. Chamber 28 is operated by the sucking power of the electric blower. Partition 27 has communication hole 27a on second opening 32 side, and the sucking operation is obtained through hole 27a, which aims to cool the motor by sucking outside-air through outside-air taking room 21, first opening 6, cylindrical body 1, motor bracket 4 and second opening 32.

[0010] The accompanying drawing in accordance with this exemplary embodiment shows two pieces of hose 23. When only one hose 23 is used, communication hole 27a can communicate sucking chamber 28 so that sucking power directly works through second opening 32. Therefore, the motor can be cooled down more efficiently. In this case, sucking mouth 38 is placed closely to communication hole 27a so that mouth 38 can get strong sucking power. In this case, i.e. with one hose 23, when hose 23 is placed opposite to hole "27a", air sucked through second opening 32 and communication hole "27a" efficiently transfers the dust collected by brush 2 and moved in sucking chamber 28 laterally into hose 23. The placement of hose 23 opposite to communication hole "27a" arranges sucking mouth 38 and first opening 6 on the same side of floor nozzle 22 with regard to lateral direction. The rotary brush is placed in sucking chamber 28, and opening 45 is provided on the bottom of nozzle 22 corresponding to the lower portion of the rotary brush so that the rotary brush faces the floor

side.

[0011] Fig. 3 illustrates a more compact structure where carbon brush 5 is integrated into cylindrical body 1. This structure allows floor nozzle 22 to utilize its width more effectively, or to be smaller in size. Fig. 3 also illustrates that fin 24 is provided on rotor shaft 9, fin 25 is provided on the inner wall of cylindrical body 11, and fin 26 is protruded on a side wall of cylindrical body 1. These arrangements eliminates the speed reduction mechanism and realizes direct driving as well as blows air inside the motor in the cylindrical body 1 as wind creating means to cool the motor. Each fin can be independently used or combined with each other depending on the cooling effect.

[0012] Fig. 4 illustrates that manual reset type thermoprotector 29 functions as a detector. It has heat-sensitive section 30 and manual reset button 31. In an operation, once a temperature rises abnormally, the apparatus stops working, and this manual reset button 31 prevents the apparatus from automatically starting again when the temperature lowers naturally. The apparatus can be started again by operating the manual reset button after identifying the abnormality.

[0013] Fig. 5 illustrates a rotary brush device incorporating an outer rotor motor. The major point of difference as compared to Fig. 3 includes; rotor 33 comprising a magnet is fitted to inner wall of cylindrical body 1, stator 34 is fixed to motor shaft 35 of which both ends are held and fixed by floor nozzle 22, cylindrical body 1 at the left end is journaled by the outer ring of first bearing 11 which is press fitted in the inner ring with outer wall of stator bracket 36, while at the right end of cylindrical body 1 is journaled with its side wall by bearing 37. Sucking intake 38 for hose 23 to suck the air from sucking chamber 28 of floor nozzle 22. In the present exemplary embodiment, hose 23 has been provided for two. However, there may be one hose 23 only, in which case only one sucking intake may be provided at one end.

[0014] In Fig. 6, outside-air intake 39 is provided on the top portion of floor nozzle 22. The portion where outside-air intake 39 is placed corresponds to space F (ref. Fig. 2) of outside-air taking room 21 separated by partition 27 from sucking chamber 28. While second opening 32 faces space "E" separated from sucking chamber 28 which is placed opposite to outside-air intake 39. As shown in Fig. 7a, partition 27 with regard to space "E" has communication hole "27a" leading to sucking chamber 28. Therefore, when electric blower 43 exerts its sucking power to sucking chamber 28, sucking power is effected to communication hole "27a", second opening 32, inside of cylindrical body 1, first opening 21 and space "F" sequentially, thereby taking outside-air from outside-air intake 39. This outside-air taken inside cools the motor. In Fig. 7(a), floor 24 is to be cleaned. In Fig. 7(b), recess 40 is provided in the bottom of floor nozzle 22, opening 41 is provided in recess 40. Opening 41 is connected through with space "E" and sucking chamber 28. Consequently, the sucking power of sucking cham-

ber 28 works to space "E", thereby producing airflow indicated by the arrow mark. As a result, motor can be cooled as discussed previously. At the same time, the dust on the floor which recess 40 faces also can be sucked to sucking chamber 28 side. Outside-air intake 39 is provided on the upper face of the floor nozzle so that dust collected by the rotary brush can be restrained from sucking. As a result, the motor can be cooled with cooling air excluding the dust. In Fig. 8 and Fig. 9, vacuum cleaner body "G" incorporates dust chamber 48 and blower 43, and the lower part of the body is mounted to the rear portion of floor nozzle 22 so that body "G" can be arbitrarily slanted.

[0015] In Fig. 10, numeral 43 denotes an electric blower for sucking the air, dust bag 44 is provided within dust chamber 48, sucking mouth 45 is provided on the bottom of nozzle 22, rotary brush 46 is provided within nozzle 22. The floor nozzle and the rotary brush shown in Fig. 1 through Fig. 7 are employed. In Fig. 11, rotary brush "46a" has bristles transplanted in a V-shape. Brushes 47 are fixedly mounted at both ends of the sucking mouth 45, and brushes 47 have bristles planted with a certain orientation for picking up lint and the like.

[0016] In the above exemplary embodiments the rotary brush is used for only one. It is of course possible to form a rotary brush device employing a plurality of rotary brushes.

[0017] Fig. 12(a) includes rotary brush 46 discussed above, and an electric apparatus 49 having a pair of floor rollers 54 in the front and the rear sections respectively incorporating an invented rotary brush device. Floor contact roller 50 is provided at the bottom end of actuator 52 that is urged down by a spring 51. As a result of detection of the floor, floor contact roller 50 is lifted up to turn switch 53, situated in the OFF position, to the ON position which activates a motor built in a rotary brush device. Fig. 12(b) illustrates a state where carpet 55 placed on floor 42 is detected and the switch 53 is turned ON. Fig. 12(c) is an electrical circuit including power source 57, detection switch 53, motor 56 built in the rotary brush device, and variable resistor 58 for controlling the rotation of the motor which is to be discussed later. An electric vacuum cleaner for floor carpet having the construction discussed above starts operation when floor contact roller 50 is pushed up by carpet 55.

[0018] In Fig. 13(a), handle 59 is tiltably attached to floor nozzle 22; when it is stood upright, switch 60 is turned OFF to break electric supply to the rotary brush device. Controller 61 is provided on the handle 59, and controls a rotation speed of rotary brush 46 through the above described variable resistor 58. Filter 62 is provided in dust chamber 48 for capturing the dusts stirred by rotary brush 46. Dust detector 63 comprises light-emitting element and light-sensing element, etc. and detects quantity of dusts being sucked into dust chamber 48. The dust detector senses the shift of output from the light-sensing element. The rotation speed of rotary brush 46 is varied in accordance with the dust quantity.

Fig.13(b) illustrates the electrical circuit of detector 63; where, phase controller 64 controls the rotation speed of the motor in accordance with result of the above described dust sensing. When controller 61 selects a rotational speed depending on the dust sensing, phase controller 64 follows the control process discussed above. In addition to this, high, mid, and low speeds are prepared so that users can arbitrarily select the rotational speed among them. This structure allows the vacuum cleaner to be handled with ease and work efficiently in terms of power consumption.

Claims

1. A rotary brush device comprising a cylindrical body with a built-in motor housed in the cylindrical body whose outer wall is provided with one of a brush, a thin-plate type agitator and a thin-plate type scraper, the cylindrical body is provided at the vicinity of one end with a first opening connecting through with outside air and a second opening at the other end, said first opening and said second opening being connected one another through the inside of motor.
2. The rotary brush device of claim 1 wherein the motor comprises a rotor and a stator provided around an outer wall of the rotor, and a shaft of the rotor is coupled with the cylindrical body by means one of direct connection and via a speed reduction mechanism.
3. The rotary brush device of claim 1 wherein the motor comprises a stator and a rotor provided in an arbitrarily rotatable manner around an outer wall of the stator, and the rotor is engaged via speed reduction mechanism with the cylindrical body.
4. The rotary brush device of claim 1 wherein a motor bracket is provided with a third opening, the third opening is connected through with the first opening and the second opening.
5. The rotary brush device of claim 1 wherein wind creating means is provided within the cylindrical body.
6. The rotary brush device of claim 5 wherein the wind creating means is formed by a fin provided on at least one of a rotor shaft, an inner wall surface of the cylindrical body and a side wall surface of cylindrical body.
7. The rotary brush device of claim 1 wherein the first opening is provided at an opposite side to the motor of the cylindrical body while the second opening is provided at the motor side of the cylindrical body.
8. The rotary brush device of claim 7 wherein the second opening is provided in a direction perpendicular to the axis of a rotary brush.
9. The rotary brush device of claim 1 wherein a detector for detecting one of a pressure and a temperature is provided in a place connected through with inside of the motor, and a power supply to the motor is controlled in accordance with a result of detection made by the detector.
10. The rotary brush device of claim 1 wherein detector for detecting electric current flowing in the motor is provided, and a power supply to the motor is controlled in accordance with a result of detection made by the detector.
11. The rotary brush device of claim 1 wherein one of the agitator and the scraper is provided on the outer wall of cylindrical body in one of a helical pattern and a V-shape form.
12. An electric apparatus comprising at least one rotary brush device recited in claim 1.
13. An electric apparatus comprising the rotary brush device of claim 9 wherein a manual reset type thermo-protector is provided as a detector for detecting a temperature, and temperature detecting part of the detector is disposed on the motor side while a reset button is disposed on an outer face of the apparatus.
14. An electric apparatus comprising a floor nozzle having a sucking chamber connected through with an electric blower for sucking and is provided with a downward opening; wherein the sucking chamber is provided with the rotary brush device recited in claim 1.
15. An electric apparatus comprising an electric blower for sucking, a floor nozzle having a sucking chamber connected through with an electric blower for sucking and is provided with a downward opening; wherein said sucking chamber is provided with the rotary brush recited in claim 1, a first and a second openings are separated from the sucking chamber, and an outside-air intake is provided in an outer face of the apparatus connecting through with the first opening.
16. The electric apparatus of claim 15 wherein the second opening is connected through with the electric blower.
17. The electric apparatus of claim 14 or claim 15 wherein the outside-air intake is provided in a top surface of the floor nozzle.

18. The electric apparatus of claim 15 or claim 16 wherein the electric blower and the sucking chamber are connected through with at least one hose.
19. The electric apparatus of claim 15 wherein the second opening is disposed on a sucking mouth side, the mouth connecting the electric blower and the sucking chamber through. 5
20. The electric apparatus of claim 15 wherein the second opening is disposed at an opposite side to the sucking mouth connecting the electric blower with the sucking chamber through, and motor cooling air exhausted from said second opening passes through around a rotary brush. 10
21. The electric apparatus of claim 15 wherein the floor nozzle has an opening at a bottom thereof, said opening connected through with the second opening so that said opening is connected through with the sucking chamber. 20
22. The electric apparatus of claim 14 or claim 15 wherein a detector for detecting a pressure is provided, and a power supply to the motor is controlled in accordance with a result of detection made by said detector. 25
23. The electric apparatus of claim 14 wherein a brush is provided on a bottom of the floor nozzle in a place between a rotary brush and respective side ends of the floor nozzle. 30
24. An electric apparatus comprising an electric blower for sucking, a dust chamber for capturing dusts, a floor nozzle provided with a sucking chamber having downward opening, a sucking mouth provided at one of the walls of said sucking chamber and is connected through with said electric blower, and the rotary brush device recited in claim 1 incorporated in said sucking chamber; 35
 wherein said floor nozzle is provided at a top part with an outside-air intake connected through with first opening, and said sucking mouth is disposed on a same side as first opening with regard to a width of said floor nozzle. 45
25. An electric apparatus comprising a pair of running rollers provided respectively at a front and a rear, floor detector for detecting a kind of floor, a switch which operates in engagement with said floor detector, and the rotary brush device recited in claim 1 wherein the cylindrical body is rotated in accordance with the kind of floor. 50
26. An electric apparatus comprising a floor nozzle which incorporates the rotary brush device recited in claim 1 and has a sucking chamber with a downward opening, an electric blower for sucking, a dust chamber for capturing dusts, and a handle tiltably attached to said floor nozzle; 55
 wherein rotation of the cylindrical body of said rotary brush device is halted when said handle is stood substantially upright.
27. The electric apparatus of claim 26 wherein a controller is provided on a part of the handle for controlling rotation of the cylindrical body of rotary brush device.
28. An electric apparatus comprising a floor nozzle incorporating the rotary brush device recited in claim 1 and having a sucking chamber with a downward opening, an electric blower for sucking, a dust chamber for capturing dusts, and a dust detector provided at a part of sucking path connecting said sucking chamber and the electric blower through; wherein rotation of the cylindrical body of the rotary brush device is controlled in accordance with an output of said dust detector.

Fig. 1

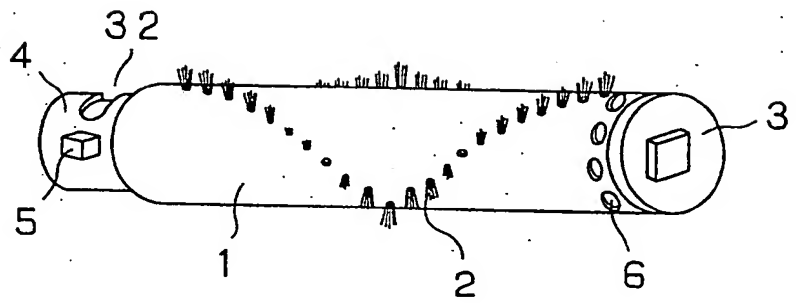


Fig. 2

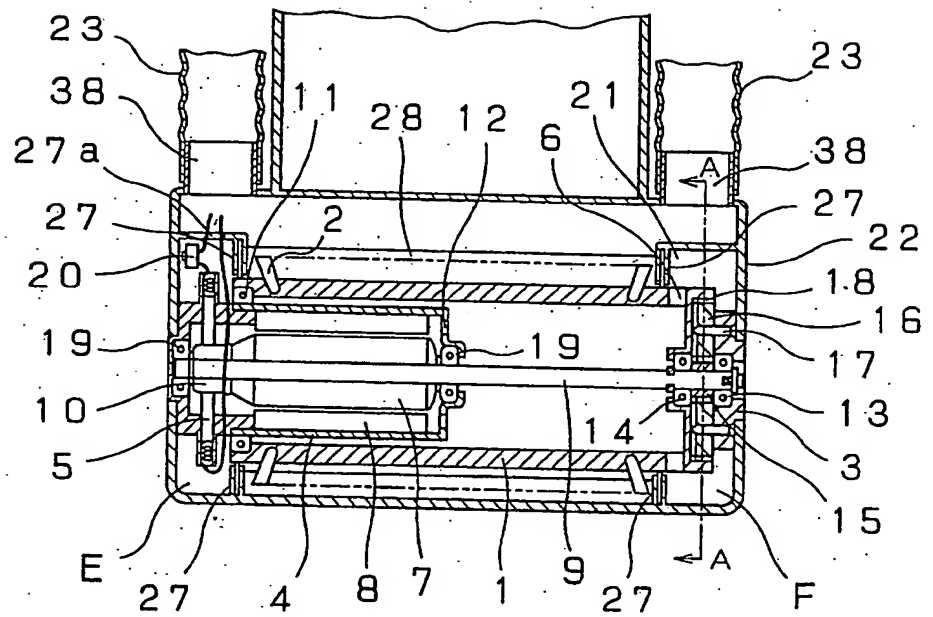


Fig. 3

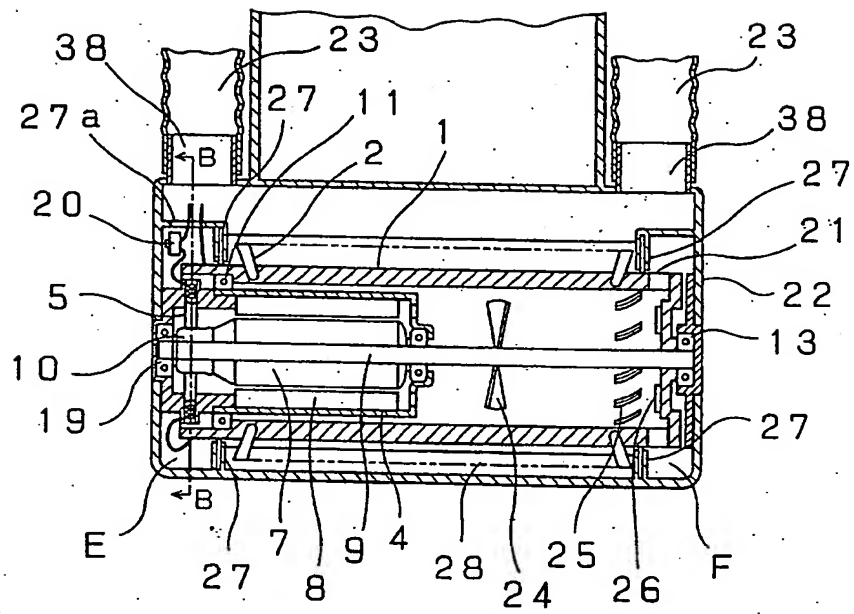


Fig. 4

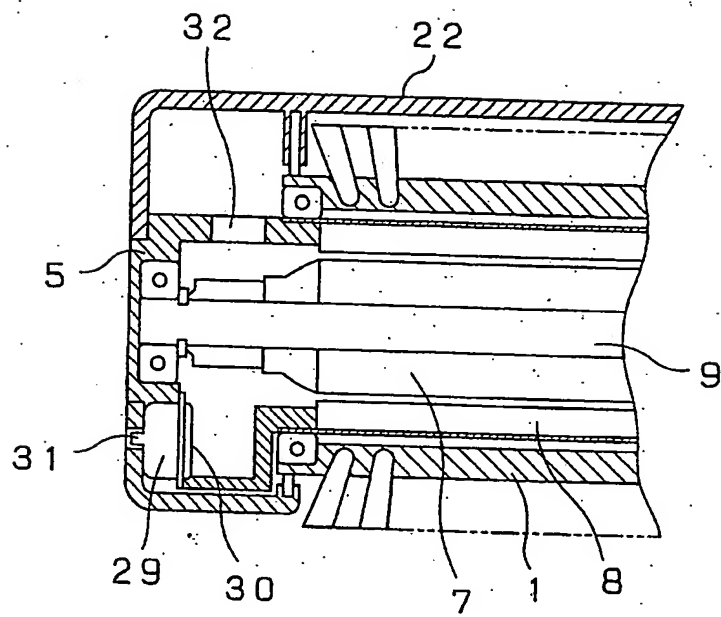


Fig. 5

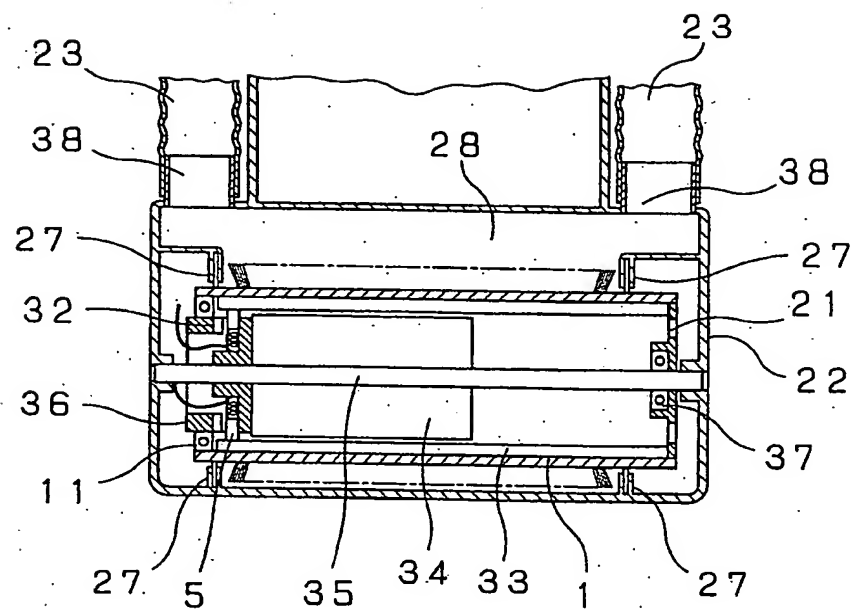


Fig. 6

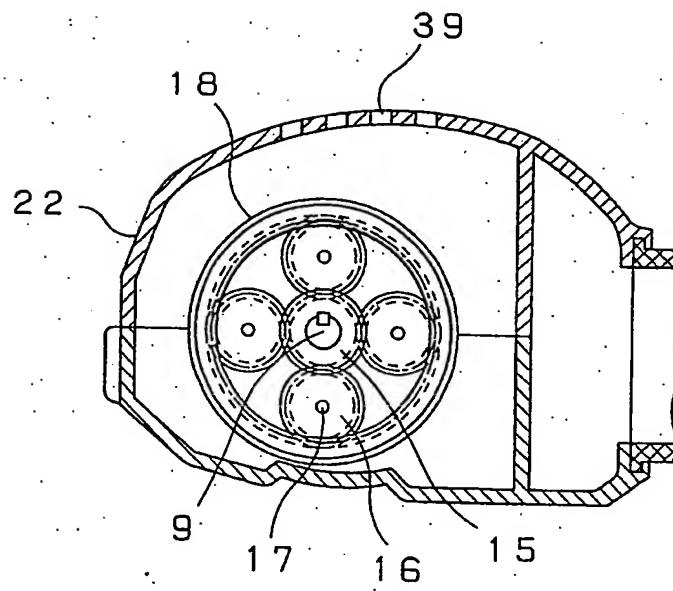


Fig. 7

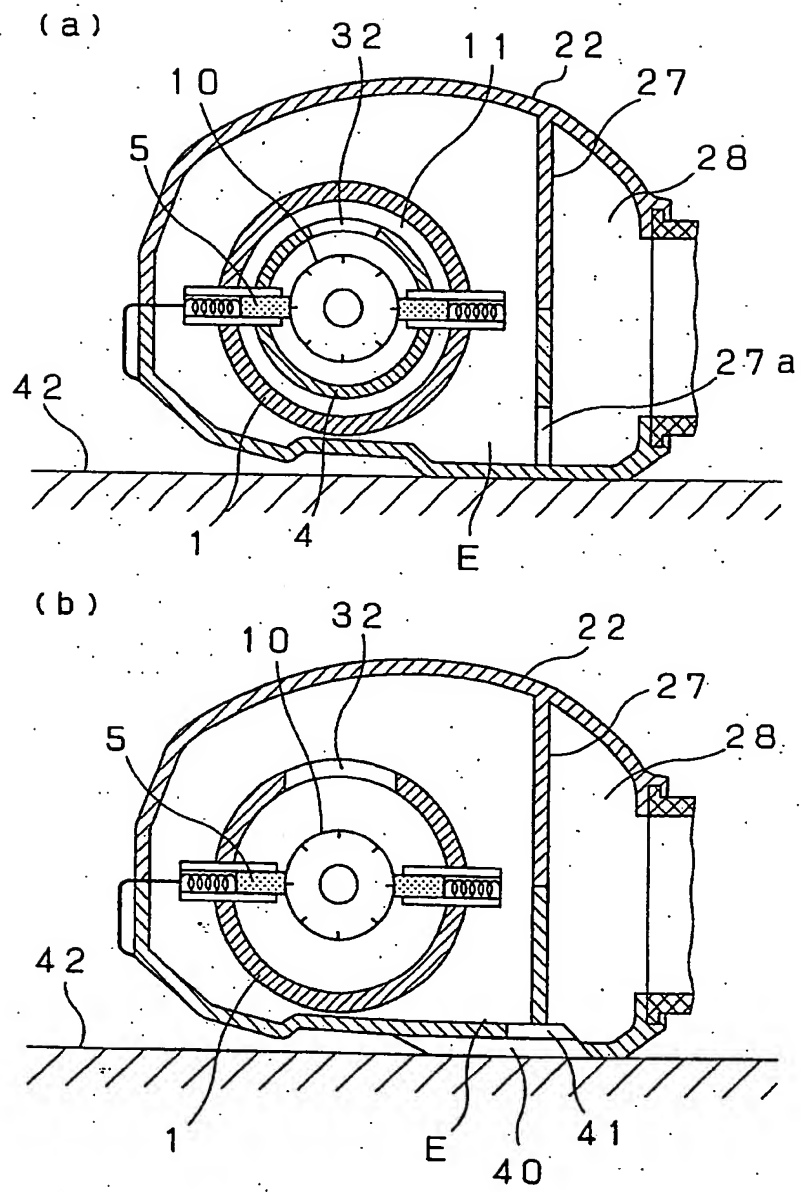


Fig. 8

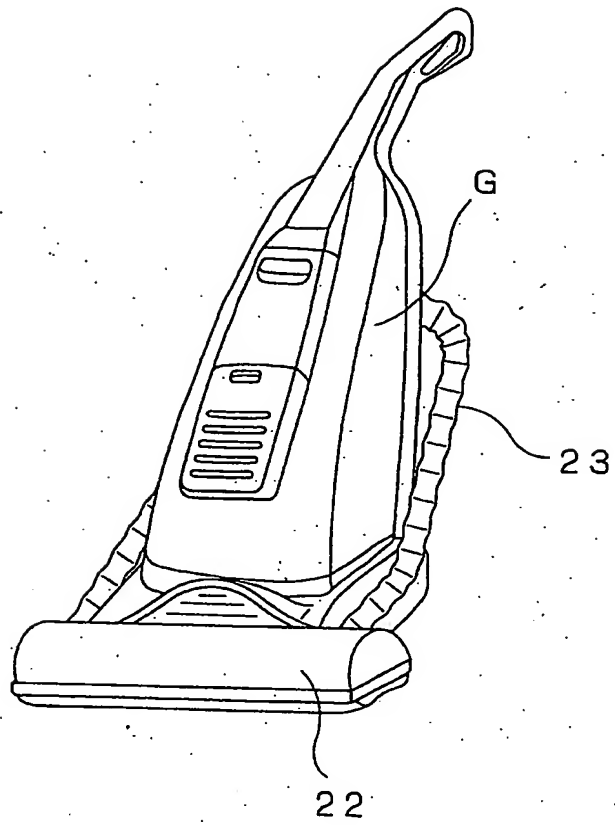


Fig. 9

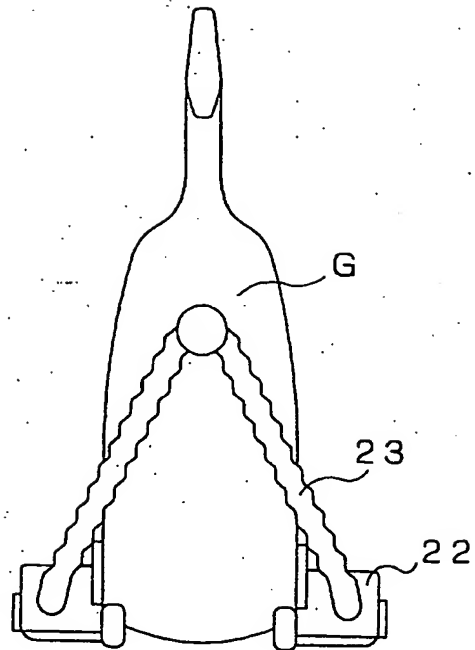


Fig. 10

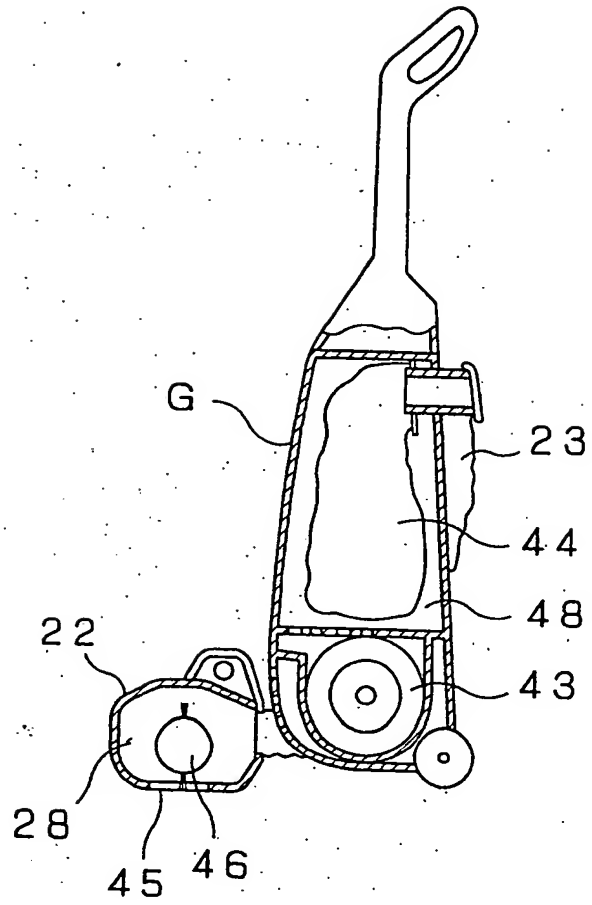


Fig. 11

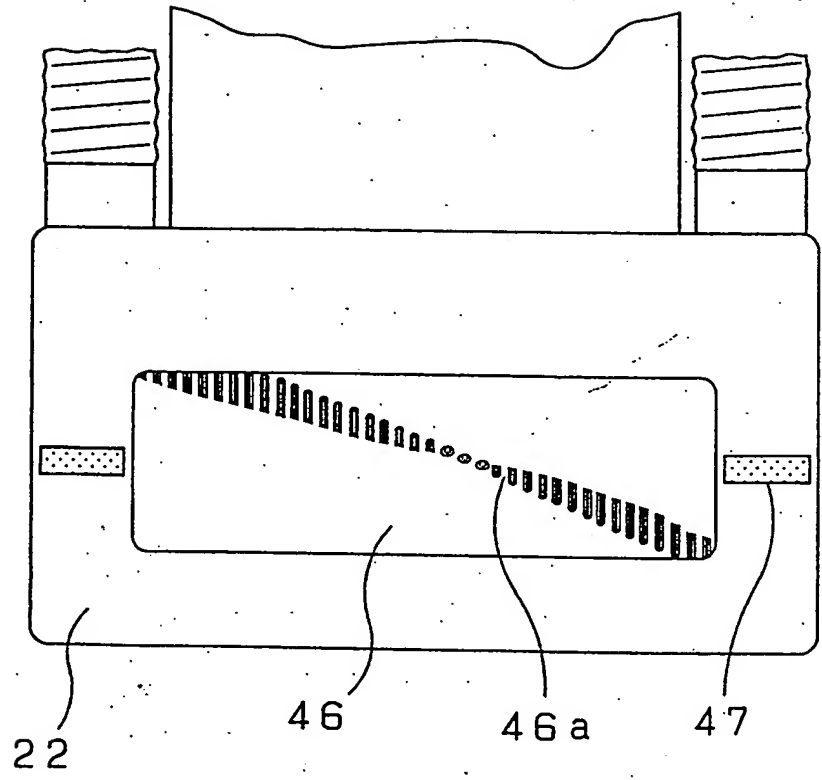


Fig. 12





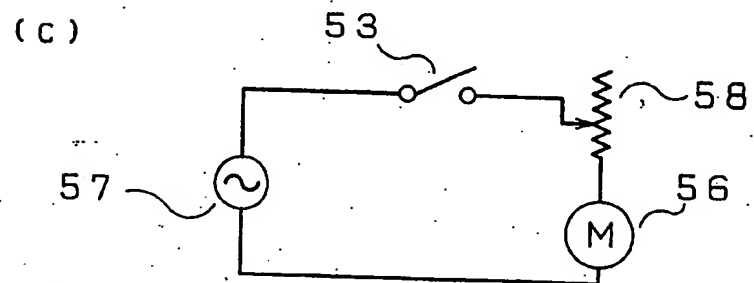


Fig. 13

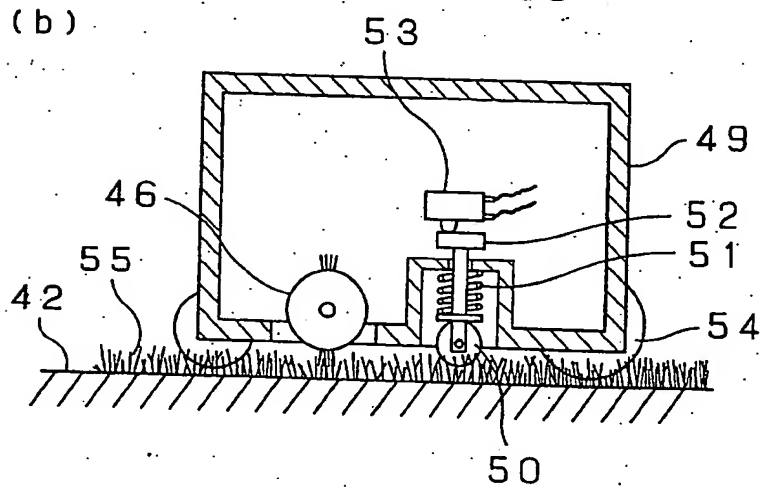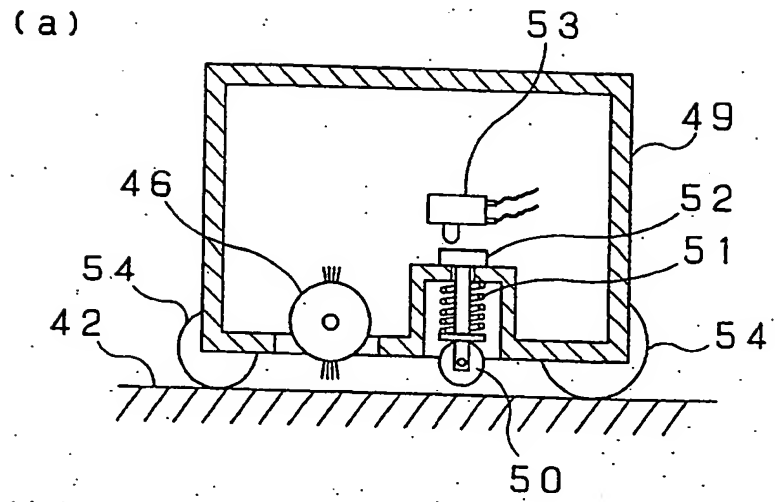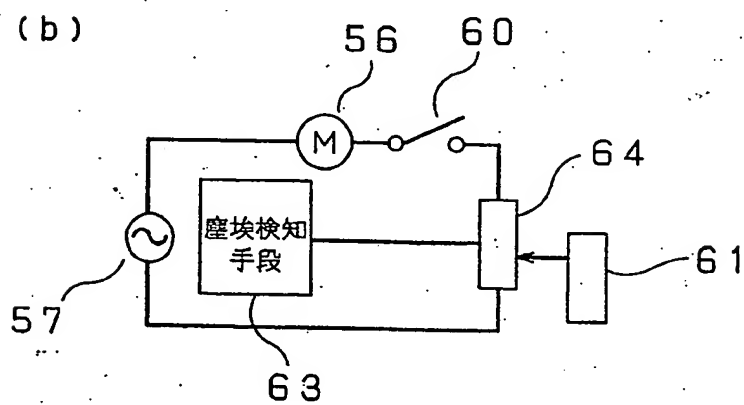

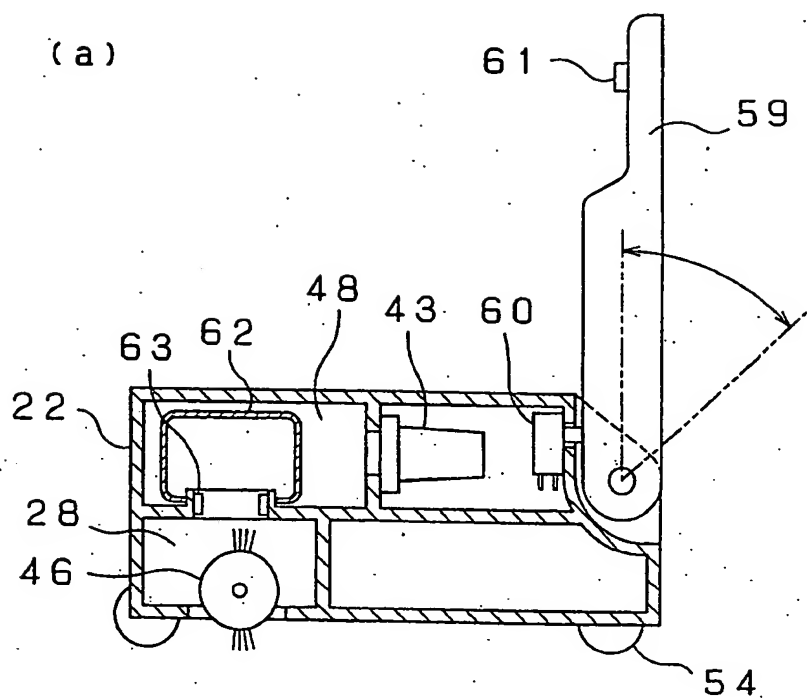

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 02 5302

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.7)
Y	US 3 172 138 A (PRICE WILLIAM B) 9 March 1965 (1965-03-09) * column 2, line 2 - column 3, line 31; figure 3 *	1,7,8, 11,12	A47L9/04 A47L5/30 A47L9/28
Y	US 4 384 386 A (DORNER JOHN R. ET AL) 24 May 1983 (1983-05-24) * the whole document *	1,7,8, 11,12	
A	DE 197 06 239 C (DUEPRO AG) 2 April 1998 (1998-04-02) * column 4, line 23-65; figure 4 *	5,6	
A	EP 0 467 347 A (SANYO ELECTRIC CO) 22 January 1992 (1992-01-22) * column 7, line 12 - column 8, line 9 * * column 16, line 35-49; claim 2 *	10,13-28	
			TECHNICAL FIELDS SEARCHED (Int. CL.7)
			A47L B65G
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 13 January 2003	Examiner Laue, F
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons S: member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 5382

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-01-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3172138	A	09-03-1965	NONE	
US 4384386	A	24-05-1983	US 4268769 A	19-05-1981
DE 19706239	C	02-04-1998	DE 19706239 C1	02-04-1998
			FR 2759572 A1	21-08-1998
			GB 2322068 A , B	19-08-1998
EP 0467347	A	22-01-1992	JP 2105732 C	06-11-1996
			JP 4075623 A	10-03-1992
			JP 8002339 B	17-01-1996
			JP 2105733 C	06-11-1996
			JP 4075624 A	10-03-1992
			JP 7112469 B	06-12-1995
			DE 69116016 D1	15-02-1996
			DE 69116016 T2	05-09-1996
			EP 0467347 A1	22-01-1992
			KR 9308371 B1	31-08-1993
			US 5255409 A	26-10-1993

EPO FORM P0158

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82